

# Titan Fall Limiter (TFL)

## Materials


Housing:	Thermoplastic Cover
Mainspring:	Stainless Steel
Brake Pawls:	Stainless Steel
Main Shaft:	Stainless Steel
Snaphook:	Drop Forged Steel
Lifeline:	1" x 06" Polyester
Thread:	No.415 6 cord bonded 3 strand polyester
Carabiner:	Zinc plated steel (if applicable)
Jaw & Jaw Swivel:	Stainless Steel (if applicable)

## Technical

Max Working Load:	310 lbs -140.62 kg
Ultimate Strength:	3000 lbs. -13.34 kN
Lifeline Tension:	3 to 4 lbs. -13.3/17.8 N
Free Fall Distance:	24" Max. - 609.6 mm
Max. Arresting Distance:	42" Max - 1.06m
Arresting Force:	900 lbs. (approx.) - 4kN
Strength Test:	300 lbs. 4' free fall (1.33 kN @ 1.22m free fall)

## Certification:

Meets OSHA 1926.502, 1910.66, ANSI A10.14, Z359.1 and CSA Z259.2.2 Type 1 requirements.

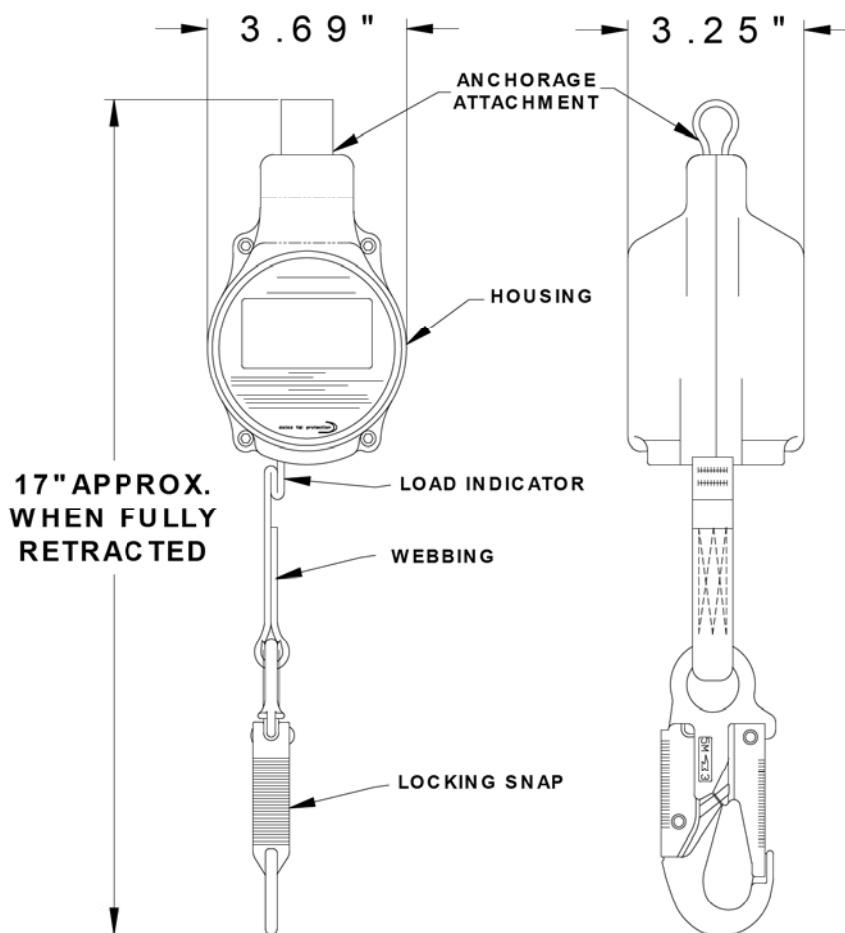

*All units are equipped with a Fall Indicator, in the event of a fall, a flag deploys to indicate the unit has been subjected to fall arresting forces and should be removed from service.*



Model #	Description	Weight
108617	TFL w/out anchorage connector	2.5
108618	TFL w/steel twist-lock carabiner.	2.8
108619	TFL w/stainless steel swivel shackle.	2.6
108620	TFL w/carabiner and swivel shackle.	2.9
108621	TFL w/locking rebar hook (2-1/2" (63mm) gate opening).	3.2



Toll Free 800.873.5242 • Phone 814.432.2118 • Fax 800.892.4078 • [www.millerfallprotection.com](http://www.millerfallprotection.com)

**WARNING!** THIS DOCUMENT PROVIDES AN OVERVIEW OF FALL PROTECTION PRODUCTS AVAILABLE FROM MILLER FALL PROTECTION AND CARE HAS BEEN TAKEN TO ASSURE THE ACCURACY OF THE DATA. IT DOES NOT PROVIDE IMPORTANT PRODUCT WARNINGS AND INSTRUCTIONS. MILLER FALL PROTECTION RECOMMENDS ALL USERS OF FALL PROTECTION EQUIPMENT UNDERGO THOROUGH TRAINING, AND THAT ALL WARNINGS AND INSTRUCTIONS PROVIDED WITH THE PRODUCTS BE THOROUGHLY READ AND UNDERSTOOD PRIOR TO EACH USE. FAILURE TO READ AND FOLLOW ALL PRODUCT WARNINGS AND INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.