


## Humidity and Temperature USB Datalogger

**Records up to 16,000 readings**  
Datalogs Humidity + Temperature readings with a user programmable sample rate

### Features:

- 32,000 readings (16,000 for each parameter: Humidity/Temperature)
- Dew point indication via Windows® software (included)
- Selectable data sampling rate: 2s, 5s, 10s, 30s, 1m, 5m, 10m, 30m, 1hr, 2hr, 3hr, 6hr, 12hr, 24hr
- User-programmable alarm thresholds for RH and Temperature
- Status Indication via Red/Yellow LED and Green LED
- Long battery life
- Dimensions: 5.1x1.1x0.9" (130x30x25mm)/Weight: 1oz (20g)
- Complete with 3.6V Lithium battery and Windows® compatible analysis software

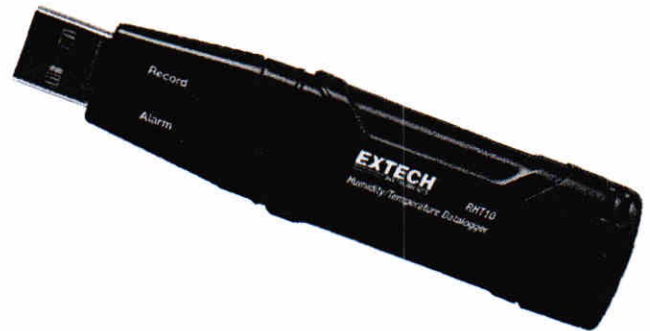

Monitors Humidity and Temperature level in a warehouse or storage room.

Specifications	Range	Resolution	Accuracy (%rdg+digits)
Temperature	-40 to 158°F	0.1°F/°C	±1.0°F (-4 to 122°F) ±1.8°F (all other ranges)
	-40 to 70°C		±0.5°C (-20 to 50°C) ±1.0°C (all other ranges)
Humidity	0 to 100%RH	0.1%RH	±3%RH
Datalogging interval	1 second to 24 hours		
Memory	Temperature: 16,000 points; Relative Humidity: 16,000 points		
Dimensions	5.1 x 1.1 x 0.98" (130 x 30 x 25mm)		
Weight	1oz (20g)		

### Ordering Information:

RHT10 .....Humidity and Temperature USB Datalogger 148423

