

MOLDEX[®]
Ideas that wear well.™



2400N95

WELDING PARTICULATE RESPIRATOR

Great for Arc
Welding!

Plus Relief From Nuisance Levels (less than OSHA Permissible Exposure Limit) of Organic Vapor Odors and Ozone.

Can be used against most welding fumes (free of oil).

Added carbon layer helps relieve against nuisance ozone and organic vapors.


Exhale valve lets workers breathe easy and stay cool.

Dura-Mesh[®] shell resists collapsing in heat and humidity.

Flame-retardants added to decrease flammability of shell.

Molded nose bridge with soft foam nose cushion increases comfort.

Facepiece is naturally contoured without pressure points.

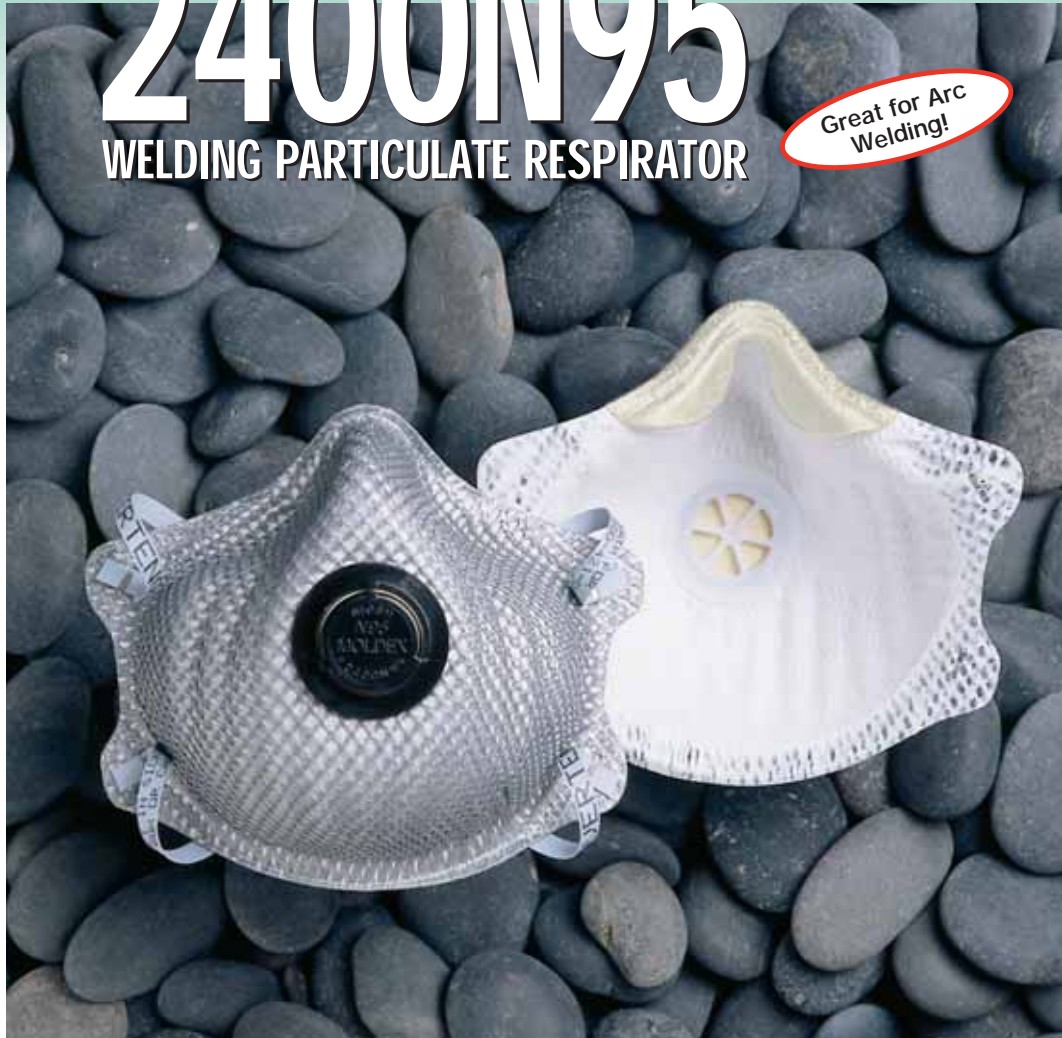

N95 PLUS NUISANCE OV/OZONE RELIEF.

NIOSH certified under 42CFR84 regulations to have a filter efficiency level of 95% or greater against particulate aerosols free of oil up to 10X PEL. A special sorbent helps relieve workers of nuisance levels (less than OSHA Permissible Exposure Limit) of ozone and organic vapor odors. Suitable for most welding fumes. Fits easily under welding hoods. (It is the user's responsibility to check current OSHA regulations and applicable guidelines for welding applications.)

COOL AND COMFORTABLE.

Workers stay cooler with an exhale valve that reduces breathing resistance and hot air build up.

SOFT FOAM NOSE CUSHION.

Easier to wear and more comfortable. Seals without a metal noseband.

DURA-MESH[®] SHELL LASTS LONGER.

The Dura-Mesh shell protects the filter media so it stays cleaner looking longer. Plus it resists collapsing, even in heat and humidity. So the respirator holds its shape longer. The result is fewer respirators used and lower cost.

MOLDEX TECHNICAL SERVICE.

Moldex provides technical assistance including help with fit testing, a *Train-the-Trainer Program*, a manual on *How To Set Up A Respiratory Protection Program* plus a Toll-Free Technical Help Line. Just call 800/421-0668 ext. 550 or 310/837-6500 ext. 550.

PARTICULATE RESPIRATOR FOR WELDING

Plus Relief From Nuisance Levels
(less than OSHA Permissible Exposure Limits)
of Organic Vapor Odors and Ozone.

2400N95

APPLICATIONS

WARNING TO USER

Follow all instructions and warnings on the use of this respirator and wear during all times of exposure. Failure to do so will reduce respirator effectiveness, wearer protection and may result in sickness or death.

Before use, the user must first be trained by the employer in proper respirator use, in accordance with applicable safety and health standards, for the contaminant and exposure level in the assigned work area.

The particulates and other contaminants which can be dangerous to your health include those which you cannot see, taste, or smell.

This product has not been sold with warnings or use instructions for personnel involved in healthcare or related situations, where there may be the possibility of contact with disease or biological hazards. If you are considering such uses, first call the Moldex Technical Service Dept., 310/837-6500 ext. 550 or 800/421-0668 ext. 550.

USE AGAINST:

1. Particulate aerosols free of oil.
2. Nuisance levels (less than OSHA Permissible Exposure Limits) of Organic Vapor Odors and/or Ozone.

DO NOT USE AGAINST:

1. Concentrations of contaminants which are unknown, or are immediately dangerous to life or health.
2. Concentrations of particulates which exceed the maximum use concentration or 10 times the OSHA Permissible Exposure Limit, whichever is lower.
3. Gases, vapors, asbestos, paint spray, sandblasting or particulate materials which generate harmful vapors. This respirator is not approved for any vapors or gases, so when used against organic vapor odors and/or ozone do not exceed the OSHA Permissible Exposure Limit.
4. Oil-based mists.

RESTRICTIONS:

1. This respirator does not supply oxygen and must not be used in atmospheres containing less than 19.5% oxygen.
2. Do not remain in contaminated area if any physical distress occurs, for example breathing difficulty, dizziness or nausea.
3. Leave contaminated area and replace respirator if it is damaged, distorted, a proper fit cannot be obtained, you taste, smell or become irritated by contaminants, or breathing becomes difficult.
4. Do not alter, modify, or abuse this respirator.
5. Store respirator in sealed bag in a clean, dry, non-contaminated area.
6. Dispose of respirator, according to your employer's policy and local regulations.
7. Dispose no later than thirty days after first use.
8. Use respirator before the "use by" expiration date printed on bag.


MOLDEX-METRIC, INC.

10111 W. Jefferson Blvd.
Culver City, CA 90232
800/421-0668 310/837-6500
FAX 310/837-9563

www.moldex.com e-mail: sales@moldex.com
Moldex and Dura-Mesh are registered trademarks.
The Mesh Design is a trademark of Moldex.
U.S. Patents #D285,374, #4,384,577, #4,850,347, #5,149,468.
Made in the U.S.A. 9700-795 REV F 9/05




APPROVAL



DEPARTMENT OF HEALTH & HUMAN SERVICES

**MOLDEX/METRIC
INCORPORATED**
CULVER CITY, CALIFORNIA, U.S.A.



NIOSH

THIS RESPIRATOR IS APPROVED ONLY IN THE FOLLOWING CONFIGURATION:			
TC -	PROTECTION	RESPIRATOR	CAUTIONS AND LIMITATIONS?
844-0883	N95	X 2400N95	A B C J M N O P

1. Protection

N95-Particulate Filter (95% filter efficiency level) effective against particulate aerosols free of oil; time use restrictions may apply

2. Cautions and Limitations

A- Not for use in atmospheres containing less than 19.5 percent oxygen.
 B- Not for use in atmospheres immediately dangerous to life or health.
 C- Do not exceed maximum use concentrations established by regulatory standards.
 J- Failure to properly use and maintain this product could result in injury or death.
 M- All approved respirators shall be selected, fitted, used, and maintained in accordance with MSHA, OSHA, and other applicable regulations.
 N- Never substitute, modify, add, or omit parts. Use only exact replacement parts in the configurations as specified by the manufacturer.
 O- Refer to User's Instructions, and/or maintenance manuals for information on use and maintenance of these respirators.
 P- NIOSH does not evaluate respirators as surgical masks.

TECHNICAL SERVICE

For technical assistance, information and training materials, call Moldex Technical Service Department, 800/421-0668 ext. 550 or 310/837-6500 ext. 550.

PACKAGING

- 10 Respirators per Bag
- 10 Bags per Case
- 100 Respirators per Case

LIMITED WARRANTY

IMPORTANT NOTICE TO PURCHASER

This limited warranty is made in lieu of the warranties of merchantability, fitness for particular purposes and all other warranties, express or implied. There are no other warranties which extend beyond the description on the face hereof. The physical standards and specifications of Moldex will be met by products sold. **Exclusive Remedies:** damages for the breach of this limited warranty are limited to the replacement of such quantity of Moldex products proved to be defectively manufactured. Except as provided above, Moldex shall not be liable or responsible for any loss, damage, or liability, direct, indirect, incidental, special, or consequential, arising out of sale, use, or misuse, or the inability to use products by the user.

DISTRIBUTED BY:

In Canada:

Pacesetter Sales & Associates
20 Arthur Hall Drive
Sharon, ON L0G 1V0
Tel: 905/478-8042 Fax: 905/478-8010
www.pacesettersales.com